


## Line DMX flood light(DMX512 DC type)

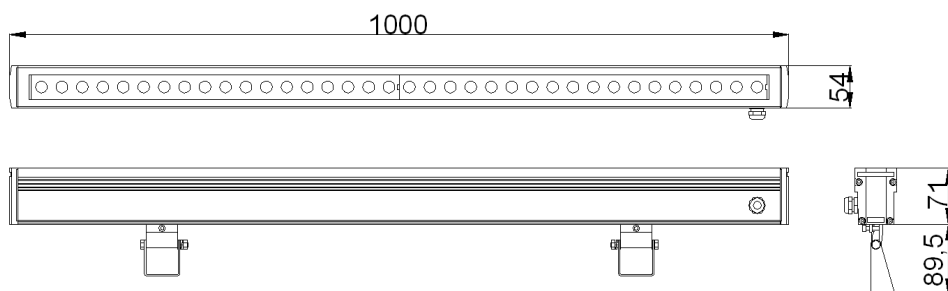

### Features

- \*.Waterproof
- \*.DMX512A (RGB full color)
- \*.Standalone play
- \*.Change DMX address with remote control
- \*.Adding termination resistor to the remote control
- \*.Full aluminum body
- \*.Glass cover
- \*.Constant current

### The Technical Specifications of LED Flood light (LH-NTL-50X)

\*. X : C = DMX,F=RGB Color

Descriptions	Specifications	Remarks
1. Driving Current(Max)	2A	Constant current
2. Power Consumption	50W	at 24V
3. Operating Voltage	20~25V VDC	
4. Recommended Voltage	24 VDC	
5. LED Quantity	36 EA	
6. LED Luminous Intensity	RED 406lm	
	GREEN 964lm	
	BLUE 253lm	
7. Operating Temperature	-20°C ~ +60°C	
8. LED Viewing Angle	15/30 degree	
9. Power input line length	350mm	
10. Data format	DMX512	
11. input	Remote control	Standalone & DMX address & Terminal resistor
12. Isolation voltage	2.5KVolt	
13. IP grade	IP66	
14. Outline Size	1000 X 54 X 160.5(H)mm	
15. Weight	2.9Kg	